



AIML0603 SERIES

SMD Multilayer Ceramic Chip Inductor

FEATURES

- Multilayer ceramic structure
- Closed magnetic circuit
- Avoids crosstalk
- Excellent solderability
- High reliability
- Counter measures for complying with FCC,VDE,CSA,VCCI and CE

OPTIONS

- Packaging: T&R is standard (Qty:4000pcs)
- Bulk packaging available for smaller quantities
- Tolerance:20% and 10% is standard, tighter tolerances available


APPLICATIONS

- Mobile Phone
- IoT
- Power Electronics
- Computer Networking
- GPS & Wireless RF Systems
- Computer Products
- Household Appliances

Part Number	L (μH)	Tol %	Q min.	SRF MHz min.	DCR Ohm max.	IDC max. mA	Test Freq. MHz
AIML-0603-47NM	47nH	± 20	15	260	0.3	50	50
AIML-0603-47NM	56nH	± 20	15	260	0.3	50	50
AIML-0603-68NM	68nH	± 20	15	250	0.3	50	50
AIML-0603-82NM	82nH	± 20	15	245	0.3	50	50
AIML-0603-R10K	.10	± 10	20	240	0.5	50	25
AIML-0603-R12K	.12	± 10	20	205	0.5	50	25
AIML-0603-R15K	.15	± 10	20	180	0.6	50	25
AIML-0603-R18K	.18	± 10	20	165	0.6	50	25
AIML-0603-R22K	.22	± 10	20	150	0.8	50	25
AIML-0603-R27K	.27	± 10	20	136	0.8	50	25
AIML-0603-R33K	.33	± 10	20	125	0.85	35	25
AIML-0603-R39K	.39	± 10	20	110	1.00	35	25
AIML-0603-R47K	.47	± 10	20	105	1.35	35	25
AIML-0603-R56K	.56	± 10	20	95	1.55	35	25
AIML-0603-R68K	.68	± 10	20	90	1.70	35	25
AIML-0603-R82K	.82	± 10	20	85	2.10	35	25
AIML-0603-1R0K	1.0	± 10	35	75	0.60	25	10
AIML-0603-1R2K	1.2	± 10	35	65	0.80	25	10
AIML-0603-1R5K	1.5	± 10	35	60	0.80	25	10
AIML-0603-1R8K	1.8	± 10	35	55	0.95	25	10
AIML-0603-2R2K	2.2	± 10	35	50	1.15	25	10
AIML-0603-2R7K	2.7	± 10	35	45	1.35	15	10
AIML-0603-3R3K	3.3	± 10	35	40	1.55	15	10
AIML-0603-3R9K	3.9	± 10	35	35	1.70	15	10
AIML-0603-4R7K	4.7	± 10	35	33	2.10	15	10
AIML-0603-5R6K	5.6	± 10	35	22	1.55	5	4
AIML-0603-6R8K	6.8	± 10	35	20	1.70	5	4
AIML-0603-8R2K	8.2	± 10	35	18	2.10	5	4
AIML-0603-100K	10	± 10	30	17	2.15	3	2
AIML-0603-120K	12	± 10	30	15	2.35	3	2
AIML-0603-150K	15	± 10	20	14	1.70	1	1
AIML-0603-180K	18	± 10	20	13	1.85	1	1
AIML-0603-220K	22	± 10	20	11	2.10	1	1
AIML-0603-270K	27	± 10	20	10	2.75	1	1
AIML-0603-330K	33	± 10	20	9	2.95	1	1

Note:1 . K= ± 1 0%,M= ± 20%,N= ± 30%

- Testing:(Equivalent acceptable) Inductance & Q-HP4195A+HP41951 DCR:VOAC-7412 SRF:HP8753C
- Solderability:90% of the terminal Electrode shall be covered Preheat: 0 260t ± 5t for 160 seconds Solder:H63AA Eutectic Solder Flux:Rosin,Dip for 5 seconds ± 1 second
- Thermal Shock: Inductance shall be Within ± 5% of initial value and Q shall be within ± 30% of initial value When temperature is -40t and +85t for 30 Min.for each 100 cycles
- Operating Temperature:-25°C to +85°C
- Storage Temperature: -40°C to +85°C

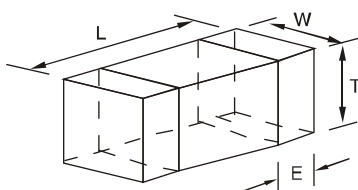

L	$\frac{0.063 \pm 0.006}{(1.6 \pm 0.15)}$	W	$\frac{0.031 \pm 0.006}{(0.8 \pm 0.15)}$	T	$\frac{0.031 \pm 0.006}{(0.8 \pm 0.15)}$	E	$\frac{0.012 \pm 0.008}{(0.3 \pm 0.2)}$
----------	--	----------	--	----------	--	----------	---

Dimensions: Inches (mm)