



EFD & ER SERIES

Telecom Transformer

FEATURES

- High inductance.
- Low leakage inductance
- Low interwind capacitance
- Compact size and Surface-mounted
- Designed to meet UL, CSA, VDE, BABT safety standard


OPTIONS

- Tape and reel is standard
- Bulk packaging available for smaller quantities
- Custom design available
- Tolerance: 5% is standard, tighter available
- SMD EFD 25/30 available

APPLICATIONS

- Modems, HUBs
- Laptop Computer
- Telecommunications
- Switching PS
- AC-DC & DC-DC Converters

Part No.	Inductance(10kHz/0.1V Typ)	Turn Ratio	DCR (0 max)	Hi-pot	Schematic
				(PH-Sec)	
EFD12	27 pH ±10%(3-4)	0.74:1:0.71(3-4:1-2:6-5)	0.21:1.15:0.35(3-4:1-2:6-5)	1250VAC	D
EFD15	4.0mH ± 6%(1-5=10-6)	1:1(1-5:10-6)	6.25:6.25(1-5:10-6)	1000VDC	A
EFD20	20mH ± 6%(1-5 tie 10+6)	1:1(1-5:10-6)	5.5:5.5(1-5:10-6)	1000VDC	A
ER9.5	200 pH Typ.(1-4)	1:1(1-4:5-8)	0.12:0.132(1-4:5-8)	1000VDC	B
ER11.5	58 pH ±10 % (4-2)	1:2(4-2:9-6)	0.35:1.75(4-2:9-6)	500VAC	C
ER14.5	14.4pH ± 10%(1-3)	1:1:1(1-3:4-5:10-6)	0.063:0.28:0.066(1-3:4-5:10+9-6+7)	500AC	E

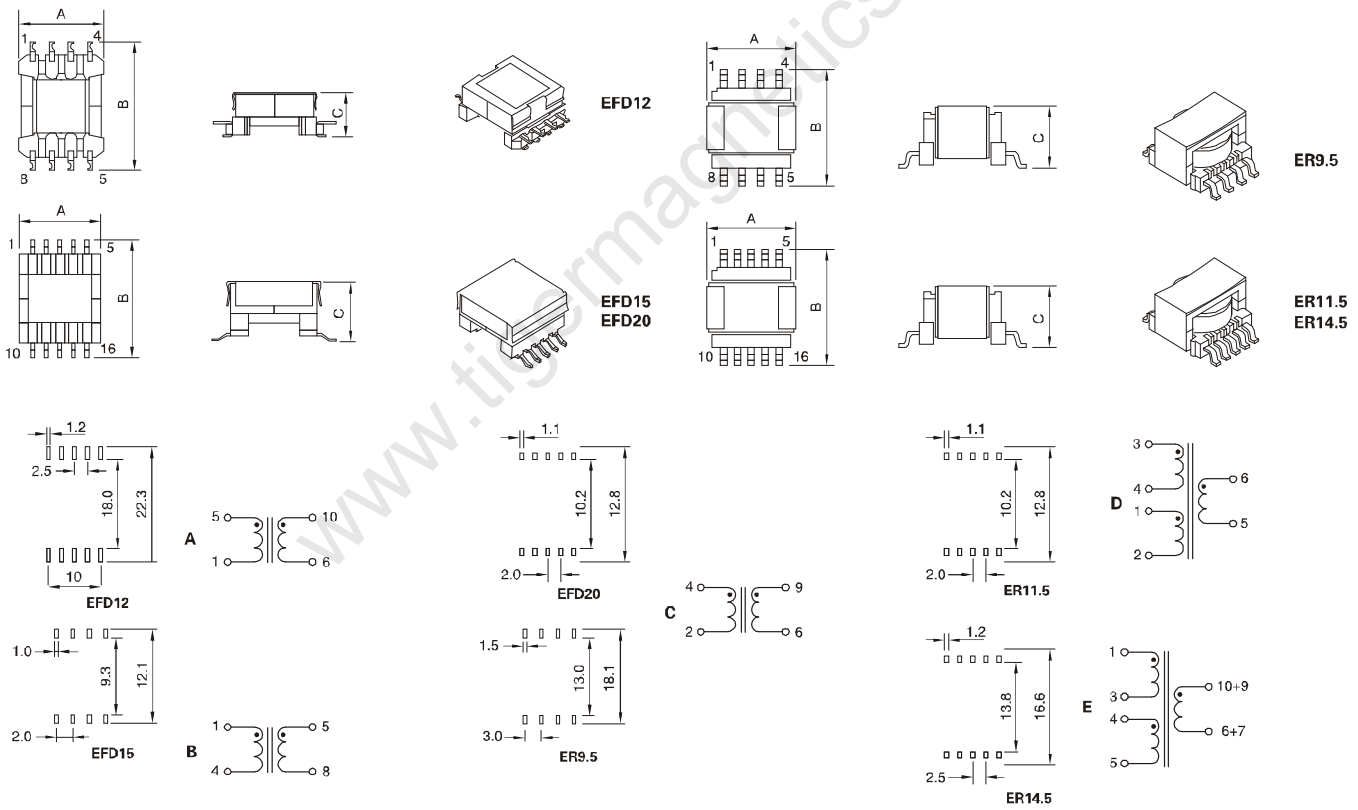

Note: All Dimensions in mm

Part No.	EFD12	EFD15	EFD20	ER9.5	ER11.5	ER14.5
A	14.0max	16.5max	22.0max	10.5max	12.2max	15.2max
B	21.5max	22.3max	26.0max	12.1max	12.7max	16.5max
C	7.4max	8.6max	11.4max	6.2max	6.5max	7.2max