



ADSL-205, 213 SERIES

ADSL CENTRAL OFFICE POTS SPLITTER

FEATURES

- Excellent Longitudinal Balance
- DC Current up to 100mA

OPTIONS

- Bulk Packaging is Standard
- Custom design available
- SMT Available

APPLICATIONS



- ADSL Central Office
- POTS Filter

Part Number	Turns Ratio	OCL (mH)	DCR Ohm (Max)	Schematic	Package
ADSL-205	1CT:1	4.0 ± 5%	3.00	1	A
ADSL-206	1CT:1	3.0 ± 5%	2.50	1	A
ADSL-207	1CT:1	2.25 ± 10%	2.25	1	A
ADSL-208	1CT:1	1.425 ± 10%	2.25	1	A
ADSL-209	1CT:1	1.65 ± 10%	2.25	1	A
ADSL-210	1CT:1	1.35 ± 10%	2.25	1	A
ADSL-211	1:1	4.0 ± 5%	3.00	2	B
ADSL-212	1:1	10.0 ± 5%	5.00	2	B
ADSL-213	1:1:1:1	0.6 ± 5%	2.00	3	B



Note: K: ±10%, M: ±20%

- Soldering methods: Wave,Reflow
- Operating Temperature: of 0°C to 70°C
- Storage Temperature: -55°C to 125°C


Hipot:1500VRMS.
Inductance Measured at 1KHz,100mA

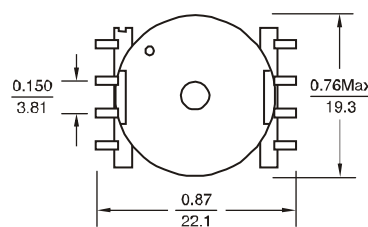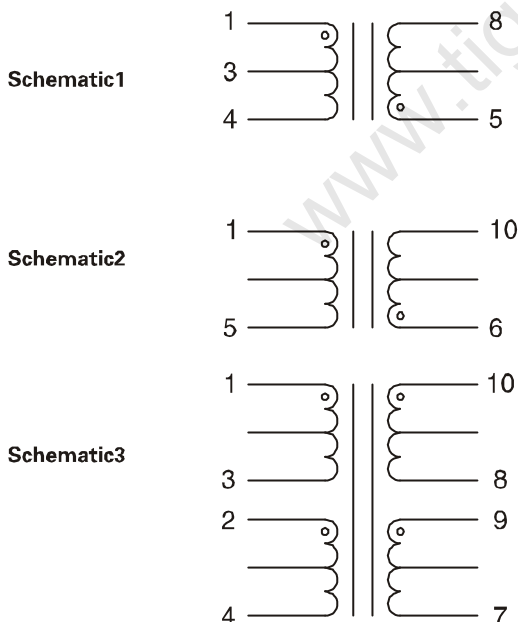

Package A

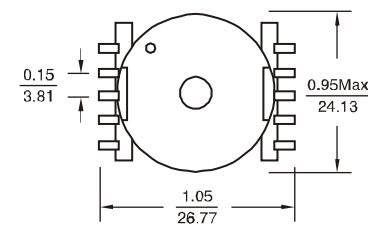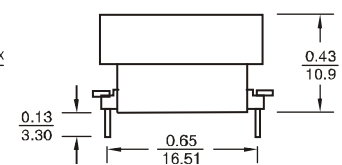

Package B

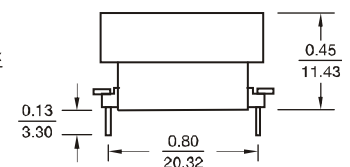

Dimensions: Inches (mm)