



PM1205P, 1254P3 SERIES

High Current SMD Power Inductors

FEATURES

- Lowest height in this package footprint.
- Shielded construction.
- Lowest DCR/H, in this package size.
- Handles high transient current spikes without saturation.
- Ultra low buzz noise, due to composite construction.
- Frequency up to 5MHz.
- The products contain no lead and also support lead-free soldering.

OPTIONS


- Tape & Reel is Standard (Qty:600pcs.)
- Bulk packaging Available for Smaller Quantities
- Tolerance:M=20% ,N=30% is Standard, Tighter Tolerances Available

APPLICATIONS

- Excellent for power line DC-DC conversion
- Applications used in power switching
- Personal computers and other Handheld electronic equipment

Part Number	Thickness mm Max.	Inductance L (μH) ±20%	I rms (A)	Isat (A)	DCR mOhm max.	Part Number	Thickness mm Max.	Inductance L (μH) ±20%	I rms (A)	Isat (A)	DCR mOhm max.
PM1205P-R36M	5.0	0.36	41	75	1.1	PM 1254P3-R68M	5.4	0.68	29.7	38.8	1.5
PM1205P-R47M	5.0	0.47	38	65	1.3	PM 1254P3-1ROM	5.4	1.00	25.7	33.6	2.0
PM1205P-R50M	5.0	0.50	36	55	1.5	PM 1254P3-1R2M	5.4	1.20	23.1	26.9	2.6
PM1205P-R56M	5.0	0.56	36	55	1.5	PM 1254P3-2R2M	5.4	2.20	17.8	19.6	4.5
PM1205P-R68M	5.0	0.68	34	54	1.7	PM 1254P3-3R3M	5.4	3.30	14.4	17.5	7.0
PM1205P-1 ROM	5.0	1.00	29	50	2.5	PM 1254P3-4R7M	5.4	4.70	12.8	14.9	8.8
PM1205P-1R5M	5.0	1.50	23	48	4.1						

- Test Frequency : 100KHz / 0.25Vdc
- Testing Instrument : L:HP4284A, CH11025, CH3302, CH1320, CH1320S LCR METER/Rdc:CH16502, Agilent33420A MICRO OHMMETER.
- Heat Rated Current (I_{rms}) will cause the coil temperature rise approximately, ΔT=40°C without core loss.
- Saturation Current (I_{sat}) will cause L₀ to drop approximately 20%
- The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Operating Temperature & Storage Temperature: -40°C - +105°C.

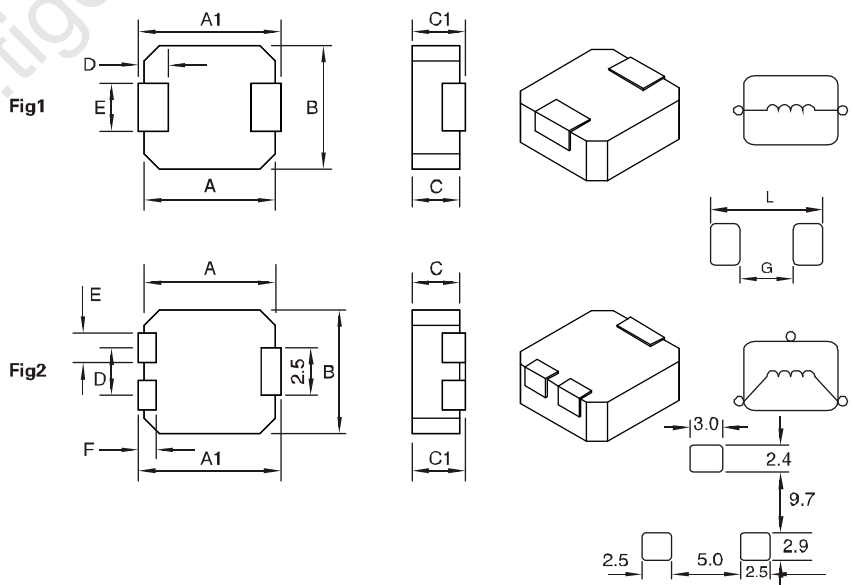

Dimensions(mm)

Series	A(mm)	A1(mm)	B(mm)	C(mm)	C1(mm)	D(mm)	E(mm)	F(mm)	L(mm)	G(mm)	H(mm)	Fig
PM 1205	12.7 ± 0.3	13.9 max.	13.5 max.	5.0 max.	5.2 max.	2.5 ± 0.5	3.0 ± 0.5	—	15.0	7.0	4.5	1
PM 1254	12.9 ± 0.3	13.9 max.	13.9 max.	5.3 max.	5.4 max.	7.6 ± 0.3	2.0 ± 0.3	2.0 ± 0.3	Refer to fig 1			2