



# LGS 0606-0708 SERIES

## Through Hole Radial Shielded Power Inductor

### FEATURES

- Magnetic Shielded Construction
- Heat Resistant Molded Resin
- Excellent Mechanical Strength
- High Reliability
- Low Profile


### OPTIONS

- Packaging: T&R Standard 2Kpcs
- Tolerance: 10% and 5% is standard
- Lower tolerances available.

### APPLICATIONS

- VCR, AC-DC, DC-DC Converter
- Video Cameras
- Communication System
- Automotive System
- LCD TV
- Power Supply
- Network System
- Computer

Part Number	L $\mu$ H	Test Freq. KHz	DCR ohm Max.	IDC max. A
LGS0606-220M	22	2.52	0.13	960
LGS0606-270M	27	2.52	0.18	870
LGS0606-330M	33	2.52	0.21	780
LGS0606-390M	39	2.52	0.26	720
LGS0606-470M	47	2.52	0.29	660
LGS0606-560K	56	2.52	0.33	600
LGS0606-680K	68	2.52	0.36	550
LGS0606-820K	82	2.52	0.39	500
LGS0606-101K	100	0.001	0.54	450
LGS0606-121K	120	0.001	0.62	410
LGS0606-151K	150	0.001	0.72	370
LGS0606-181K	180	0.001	0.88	340
LGS0606-221K	220	0.001	0.99	300
LGS0606-271K	270	0.001	1.52	270
LGS0606-331K	330	0.001	1.69	250
LGS0606-391K	390	0.001	1.85	230
LGS0606-471K	470	0.001	2.85	210
LGS0606-561K	560	0.001	3.21	190
LGS0606-681K	680	0.001	3.6	170
LGS0606-821K	820	0.001	4.87	160
LGS0606-102K	1000	0.001	5.65	140
LGS0708-220M	22	2.52	0.08	1600
LGS0708-270M	27	2.52	0.1	1400
LGS0708-330M	33	2.52	0.14	1300
LGS0708-390M	39	2.52	0.15	1200
LGS0708-470M	47	2.52	0.17	1100
LGS0708-560K	56	2.52	0.19	990
LGS0708-680K	68	2.52	0.21	890
LGS0708-820K	82	2.52	0.27	810
LGS0708-101K	100	0.001	0.32	740
LGS0708-121K	120	0.001	0.36	670
LGS0708-151K	150	0.001	0.51	600
LGS0708-181K	180	0.001	0.57	550
LGS0708-221K	220	0.001	0.76	500
LGS0708-271K	270	0.001	0.86	450
LGS0708-331K	330	0.001	0.97	410
LGS0708-391K	390	0.001	1.28	370
LGS0708-471K	470	0.001	1.44	340
LGS0708-561K	560	0.001	1.61	310
LGS0708-681K	680	0.001	2.07	280
LGS0708-821K	820	0.001	2.33	260
LGS0708-102K	1000	0.001	2.72	230
LGS0708-122K	1200	0.001	3.98	210
LGS0708-152K	1500	0.001	4.5	190
LGS0708-182K	1800	0.001	6.81	170
LGS0708-222K	2200	0.001	7.56	160
LGS0708-272K	2700	0.001	8.54	140
LGS0708-332K	3300	0.001	9.74	130
LGS0708-392K	3900	0.001	12.9	120
LGS0708-472K	4700	0.001	14.7	110
LGS0708-562K	5600	0.001	20.4	99
LGS0708-682K	6800	0.001	23	89
LGS0708-822K	8200	0.001	30.6	81
LGS0708-102K	10000	0.001	35	74

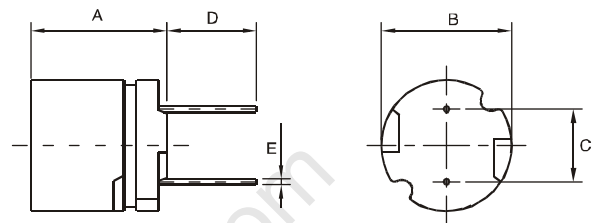

DIMENSIONS IN: mm

Part number	A	B	C	D	E
LGS0606	6.5Max	6.0 $\pm$ 0.5	4.0 $\pm$ 0.5	4.0Min	0.55
LGS0708	7.5Max	7.8 $\pm$ 0.5	5.0 $\pm$ 0.5	4.0Min	0.65

- Testing: (Equivalent acceptable) Inductance: HP4342A HP4284A
- RDC: QuadTech 1880 Milliohm meter
- Q- HP4342A - SRF-HP4191A
- DC current is decreased 10% against its initial value
- Operating temperature: -40°C to +105°C
- Storage Temperature: -40°C to +105°C
- Solder methods: Vapor Phase, Infrared Reflow
- Resistance to soldering heat: 260°C for 10 seconds
- Solvent resistance: Conforms to MIL-STD-202E
- Marking: Inductance & Tolerance
- Note: All specifications subject to change without notice.